

BLUETOOTH MOBILE PATROL SOLUTION PROFESSIONAL MANUFACTURER SINCE 2006

Reliable Range

between PatrolScanner and Bluetooth checkpoint is less than




Live Data Monitoring

Real time data monitoring helps manager discover & resolve issues in time during patrols



SOS Button

SOS button will allow supervisor to take action in case the guards who is in danger and need help.

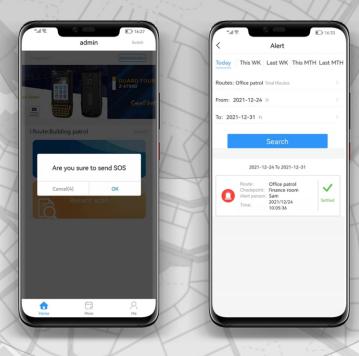


Reporting in Pictures


A picture is worth a thousand words, available in multiple pictures reporting



System Configuration

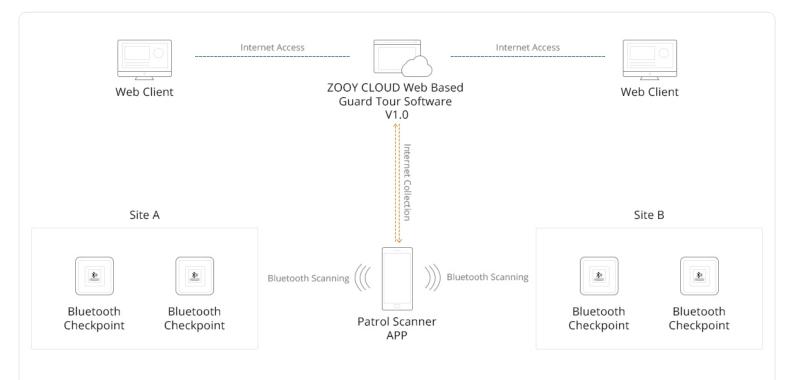


Checkpoint Detail

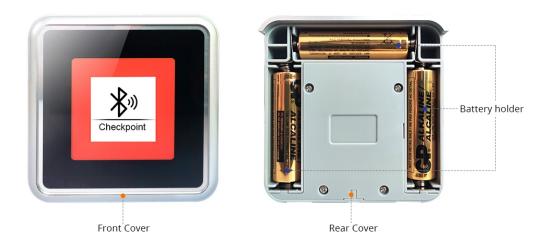

Frequency	Bluetooth	Distance	Less than 10 meters
Installation	Wall mounted, no wiring	Material	PVC panel, engineering plastic shell
IP rating	IP 65	Size	82*82*20mm
Power Supply	4.5V 3 pcs AA battery	Battery life	2 years

Installation Guide



Method 1

Preparation: screw driver x 2, AA battery x 3

1.Drill 6mm holes on the wall, and put the wall plug;

2.Fix the rear cover by screws;

3.Install battery and put the tag panel into the rear cover; 4.Fix the tag panel by screw.

4.FIX the tag panel by screv

Method 2

Preparation: silicon sealant x 1, screw driver x 1, AA battery x 3


1.Glue the rear cover on the wall by silicon sealant

2. Install battery and put the tag panel into the rear cover;

3. Fix the tag panel by screws.

Software Pricing Plans

Choosing a Software Plan That's Right For You

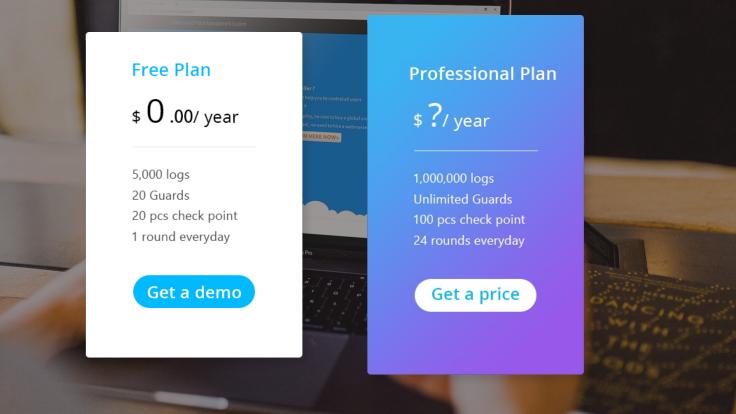

Contact Us

Shenzhen ZOOY Technology Development Co., Ltd.

Address: 2F,Building No.2,Huihuayuan Industrial Park ,Donghuan 2nd Road, Longhua New District, Shenzhen city, China

Email: info@zyactech.com

Tel: +86 0755 2163 4860

Skype: zooypatrol





WhatsApp

Wechat