




DISPLAY LIGHTING GUARD TOUR SYSTEM

PROFESSIONAL MANUFACTURER SINCE 2006



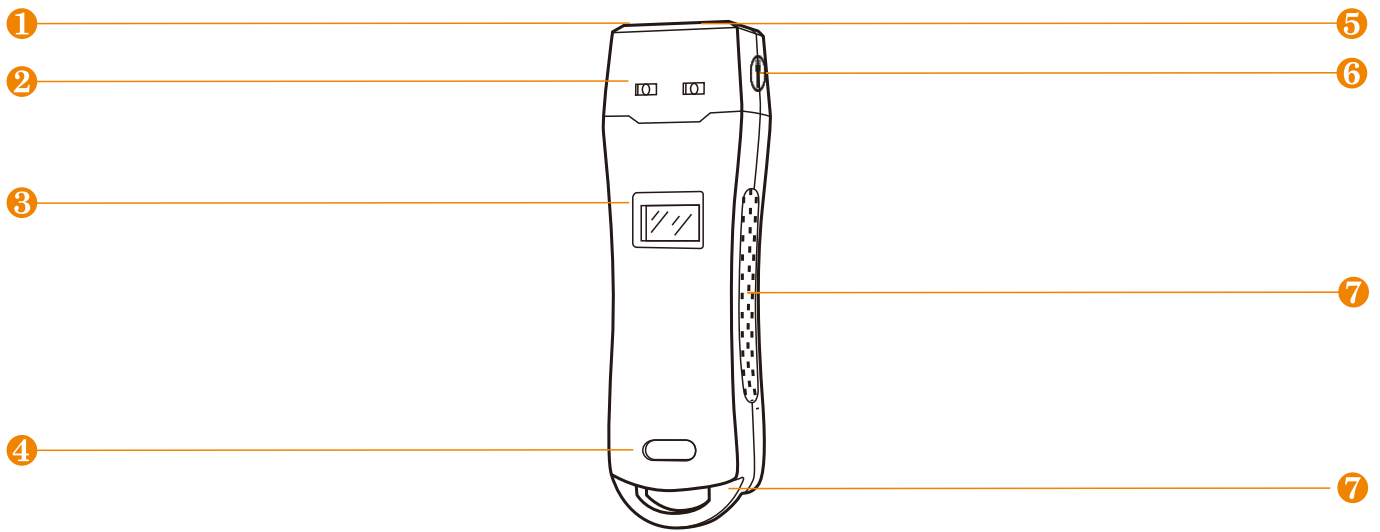

- ① Sensor area
- ② LED indicator
- ③ Display
- ④ Label Area
- ⑤ Torch
- ⑥ Switch
- ⑦ Anti-slide area
- ⑧ USB port

Benefits



RFID Reading

Through the 125Khz frequency reading the tag, unnecessary to direct touching the checkpoint via Equipment.




Lighting Extension

A reliable flashlight can save you from any situation where you need light.



Touch Switch

Awake up the torch by long touching the switch over 3 seconds.



Impact Records


Impact record is a timing when employee beating the equipment, once generated will be permanently stored, administrator can follow this in apportioning blame.

Technical Parameters


Model	Z-6200X
Display	0.8" LCD, can display time, card number, records, impact record, etc
Lighting	Long touch to enable (Low, Medium, Strong, strobe and SOS)
Reading technology	Read 125kHz EM(ID) tags proximity
Material	Aluminum alloy
Storage	80,000 pieces
Impact record	32,000 pieces
Workable temperature	-20 to 70 °C
Workable humidity	30% to 90%
Communication	USB cable
Battery	3.7v built-in rechargeable li-ion battery
Prompt	LED + Vibration
Standard accessories	Data cable, safety protective cover, charger plug, software
Baud rate	115200 bps
Performance	IP 67, waterproof, shockproof
Dimension	130mm x 40mm x25mm
Net weight	170g

*Real-time solution for offline reader please reference to E-catalog of Z-9200 internet communication station

Working Map

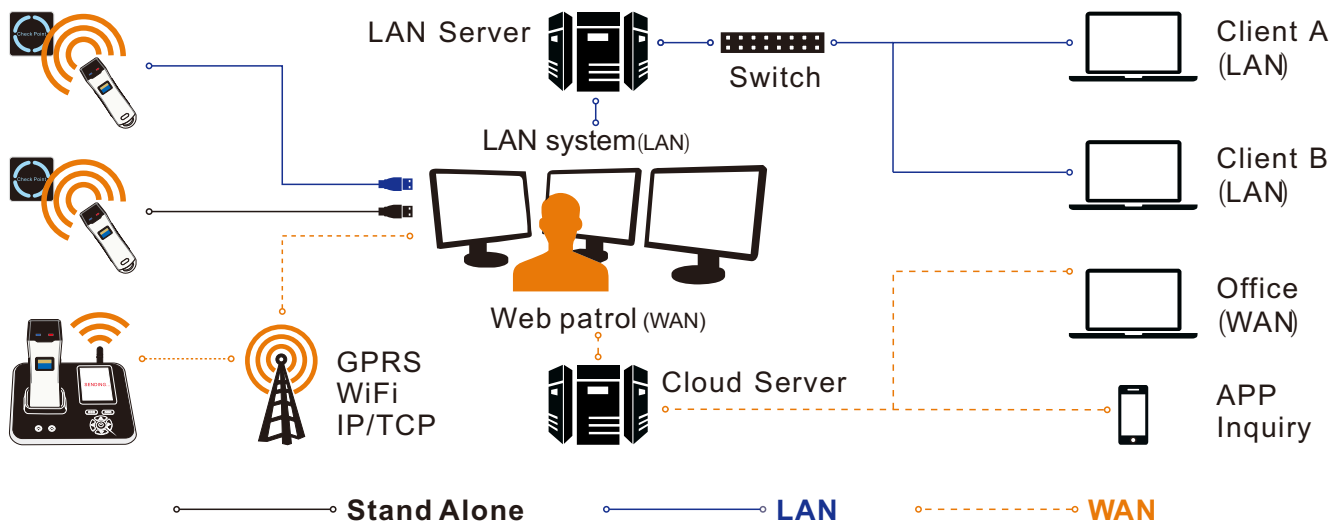

Content

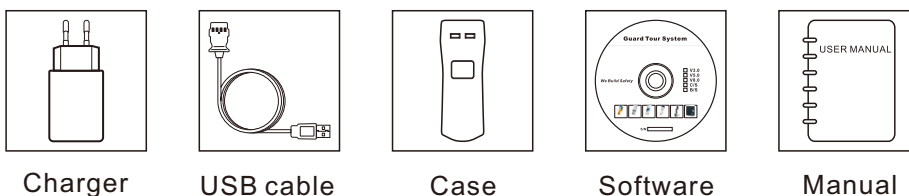

Charger

USB cable

Case

Software

Manual