



Z-6900F

FINGERPRINT GPS GUARD TOUR SOLUTION

PROFESSIONAL MANUFACTURER SINCE 2006



Key Features


- 125KHz RFID proximity reading
- GPRS real time transmission
- Live GPS & route history playback
- Fingerprint recognition
- Auto alert for missing checkpoint
- SOS alarm button
- Event record
- Impact record



ZOORY Z-6900 is a GPS guard tour system that based on 125 KHz proximity reading technology, which contains the feature like, GPRS real time transmission, live GPS tracking and history route playback, event record, fingerprint recognition, SOS alarm and impact record.

During patrol working, the security duty officer carry Z-6900 and log in by identifying his fingerprint, walking along with scheduled patrol route , when he arrived to check location, use Z-6900 to scan check point which will ask to verify fingerprint again to make sure always is the real guard patrolling, and then record patrol time, location and staff automatically. Duty person can also record the exceptions with device if any incident found , once data is stored into Z-6900 , it will be sent out to server in real time via GPRS (Sim card inside), the supervisor can monitor data via background software at the same time .


Layout

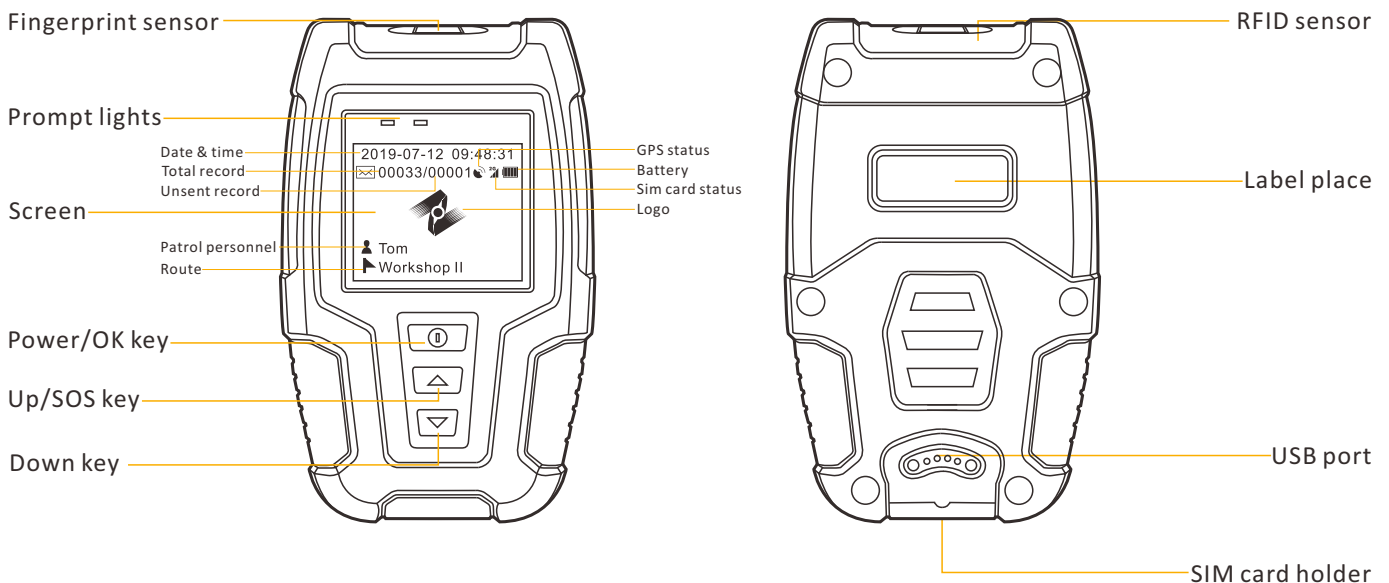


Specification

GPRS	2g frequency	850/900/1800/1900MHz
	Sim card	Micro- sim card
	Data usage	220kb/1,000 logs
GPS	Precision	≤ 10 meters(outdoor)
	Data usage	1.8 Mb per day(2s/coordinate)
Feature	Reading technology	125kHz ID tag
	Reading range	3cm-5cm
	Record	80,000 logs
	SOS	Long press UP key for 3s
	Fingerprint	225 pcs, semiconductor fingerprint sensor
Battery	Battery capacity	3000mAh
	Battery life	Charging 500 times
	Charging time	3-5 hours
	Working time	27hours
	Stand-by time	68hours
	Battery level	5 levels
Screen	Size	1.8 inch TFT display
	pixels	160*128
Event	Total	500 pcs
	Per checkpoint	1-15 pcs event
	Length	31 letters
Checkpoint	Storage maximum	1,000 checkpoints
	Name length	19 letters
Staff card	Storage maximum	400 pcs
	Name length	15 letters
Time	Booting time	0.2s
	Auto sleep time	30s, 1m, 2m, 5m, 30m, 60m and never
	Flashlight time	30s, 1m, 2m, 5m, 10m, 30m
USB	Communication port	Magnetic USB port
	Transmission speed	5000log/s
System	Language	Chinese, traditional Chinese, English
	Font	Big, small
Dimension	Size	70mm x 118mm x 30mm
	Weight	230g


Accessory



Charger




USB cable



Case



Software



Manual

Working Map

